



WHEEL LOADER ATTACHMENTS



DOOSAN DELIVERS

**Doosan Attachments
are Built to Match Your
Machine's Performance.**



WHO IS DOOSAN?

With strong, reliable dealers in 90 countries, Doosan has a global manufacturing history that goes back more than 80 years. In fact, we're one of the top construction equipment manufacturers in the world.

From our design concepts to manufacturing in our ISO-certified factories, Doosan attachments are built for profit-making productivity. And we deliver high-performance service to match.

BUILT FOR | Performance | Durability | Fuel Efficiency | Comfort | Easy Maintenance



EASY MOUNTING: Hydraulic Quick Coupler

- Four point style pick-up for easy hookup—even on irregular terrain.
- Adjustment stops allow easy, precise adjustment of roll back stops to ensure proper interface with loader arms.
- Moves load center of gravity a maximum of 2" from the original pin-on mounting location.




GENERAL PURPOSE BUCKET




With a sloped bottom for maximum filling and material retention, this is the perfect bucket for day-to-day material handling. Capacities range from 2.5 to 6.5 yd³.

Pin-On

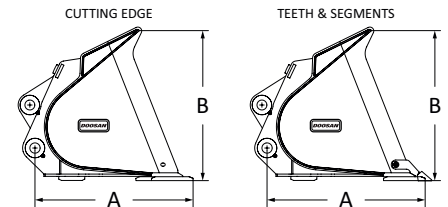

Quick Coupler

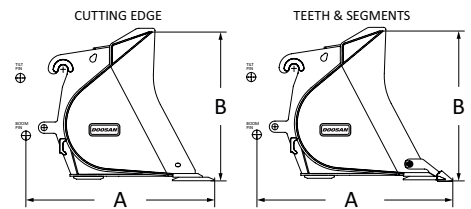

Pin-On Mounting	Width in. (mm)	A - Length in. (mm)		B - Height in. (mm)		ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)	
		cutting edge	teeth & segments	cutting edge	teeth & segments		cutting edge	teeth & segments
DL200	100.4 (2,550)	48.7 (1,237)	52.7 (1,339)	43.3 (1,100)	43.6 (1,107)	2.5 (1.9)	2077 (942)	2171 (985)
DL220	100.4 (2,550)	47.5 (1,207)	51.4 (1,306)	51.4 (1,306)	51.7 (1,313)	3.0 (2.3)	2287 (1,037)	2371 (1,075)
DL250	107.9 (2,740)	50.5 (1,283)	53.3 (1,354)	53.4 (1,356)	53.7 (1,364)	3.5 (2.7)	2521 (1,144)	2611 (1,184)
DL300	114.2 (2,900)	56.4 (1,433)	58.9 (1,496)	50.1 (1,273)	50.4 (1,280)	4.0 (3.1)	3476 (1,577)	3516 (1,595)
DL350	119.7 (3,040)	59.3 (1,506)	62.6 (1,590)	52.5 (1,334)	52.5 (1,334)	4.5 (3.4)	3687 (1,672)	3704 (1,680)
DL420	128.9 (3,275)	58.3 (1,481)	61.6 (1,565)	57.7 (1,466)	58 (1,473)	5.0 (3.8)	4910 (2,227)	5090 (2,309)
DL420	128.9 (3,275)	64.6 (1,641)	71.8 (1,824)	59 (1,499)	59.6 (1,514)	5.5 (4.2)	5874 (2,664)	6115 (2,774)
DL450	128.9 (3,275)	60.8 (1,544)	62.8 (1,595)	57.7 (1,466)	58.1 (1,476)	5.5 (4.2)	5800 (2,631)	5920 (2,685)
DL450	128.9 (3,275)	56.8 (1,443)	69.2 (1,758)	57.4 (1,458)	60.2 (1,529)	6.0 (4.6)	6000 (2,722)	6243 (2,832)
DL500	136.2 (3,459)	66.3 (1,684)	72.7 (1,847)	60.2 (1,529)	60.6 (1,539)	6.5 (5.0)	6700 (3,039)	6820 (3,094)


Quick Coupler Mounting	Width in. (mm)	A - Length in. (mm)		B - Height in. (mm)		ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)	
		cutting edge	teeth & segments	cutting edge	teeth & segments		cutting edge	teeth & segments
DL200	100.4 (2,550)	56.1 (1,425)	60. (1,524)	43.3 (1,100)	43.6 (1,107)	2.5 (1.9)	2007 (910)	2101 (953)
DL220	100.4 (2,550)	53.8 (1,367)	57.7 (1,466)	51.4 (1,306)	51.7 (1,313)	3.0 (2.3)	2207 (1,001)	2301 (1,044)
DL250	107.9 (2,740)	57.5 (1,461)	60.4 (1,534)	53.4 (1,356)	53.7 (1,364)	3.5 (2.7)	2409 (1,093)	2499 (1,134)
DL300	114.2 (2,900)	62.0 (1,575)	64.5 (1,638)	50.1 (1,273)	50.4 (1,280)	4.0 (3.1)	3358 (1,523)	3398 (1,541)
DL350	119.7 (3,040)	66.4 (1,687)	69.7 (1,770)	52.2 (1,326)	52.5 (1,334)	4.5 (3.4)	3580 (1,624)	3597 (1,632)
DL420	128.9 (3,275)	66.9 (1,699)	70.3 (1,786)	57.7 (1,466)	58.0 (1,473)	5.0 (3.8)	4660 (2,114)	4844 (2,197)
DL420	128.9 (3,275)	63.2 (1,605)	69.7 (1,770)	57.7 (1,466)	58.1 (1,476)	5.5 (4.2)	5126 (2,325)	5310 (2,409)
DL450	128.9 (3,275)	63.2 (1,605)	69.7 (1,770)	57.7 (1,466)	58.1 (1,476)	5.5 (4.2)	5126 (2,325)	5310 (2,409)
DL450	128.9 (3,275)	64.6 (1,641)	71.8 (1,824)	59.8 (1,519)	60.2 (1,529)	6.0 (4.6)	5615 (2,547)	5859 (2,658)
DL500	136.2 (3,459)	72.6 (1,844)	79.1 (2,009)	60.2 (1,529)	60.6 (1,539)	6.5 (5.0)	6030 (2,735)	6214 (2,819)

LIGHT MATERIAL BUCKET




When you need to move snow, mulch or other light material in a hurry, the light material bucket is the economical choice. Comes standard with bolt-on cutting edge.

Pin-On



Quick Coupler




Pin-On Mounting	Width in. (mm)	A - Length in. (mm)	B - Height in. (mm)	ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)
DL200	114.2 (2,900)	61 (1,549)	48.5 (1,232)	4.0 (3.1)	3214 (1,458)
DL220	114.2 (2,900)	52.9 (1,344)	51.7 (1,313)	4.5 (3.4)	3301 (1,497)
DL250	119.7 (3,040)	61.5 (1,562)	52.8 (1,341)	5.0 (3.8)	3664 (1,662)

Quick Coupler Mounting	Width in. (mm)	A - Length in. (mm)	B - Height in. (mm)	ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)
DL200	114.2 (2,900)	57.8 (1,468)	48.5 (1,232)	4.0 (3.1)	3134 (1,422)
DL220	114.2 (2,900)	59.6 (1,514)	51.7 (1,313)	4.5 (3.4)	3202 (1,452)
DL250	119.7 (3,040)	56.5 (1,514)	52.8 (1,341)	5.0 (3.8)	3572 (1,620)

MULTI-PURPOSE BUCKET



Leveling, dozing, digging, grappling, loading and dumping—this multitasking bucket is ready for whatever you've got. Capacities from 2.5 to 4 yd³.

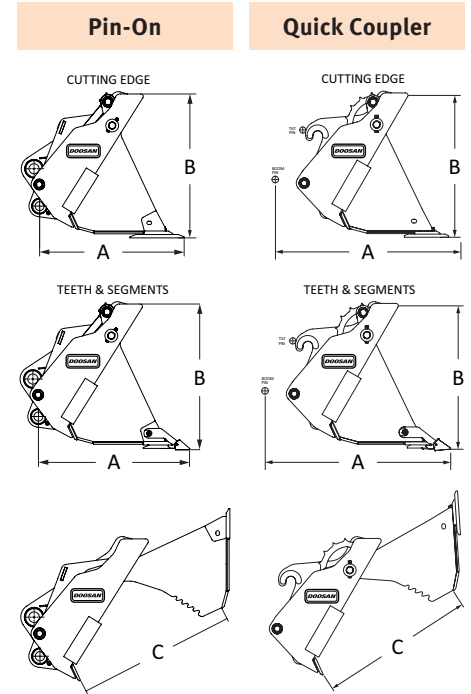

Pin-On Mounting	Width in. (mm)	A - Length in. (mm)		B - Height in. (mm)		C - Clam Opening in. (mm)	ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)	
		cutting edge	teeth & segments	cutting edge	teeth & segments			cutting edge	teeth & segments
DL200	100.4 (2,550)	45.8 (1,163)	49.6 (1,260)	45.8 (1,163)	46 (1,168)	48.5 (1,232)	2.5 (1.9)	3413 (1,548)	3506 (1,590)
DL220	100.4 (2,550)	49.5 (1,257)	53.2 (1,351)	56.9 (1,445)	57.2 (1,453)	62.3 (1,582)	3.0 (2.3)	4615 (2,093)	4708 (2,136)
DL250	107.8 (2,738)	49.9 (1,267)	53.5 (1,359)	56.9 (1,445)	57.1 (1,450)	62.3 (1,582)	3.3 (2.5)	5030 (2,282)	5119 (2,322)
DL300	114.2 (2,901)	51.1 (1,298)	53.2 (1,351)	50.8 (1,290)	51.3 (1,303)	53.5 (1,359)	3.5 (2.7)	5054 (2,292)	5089 (2,308)
DL350	119.7 (3,040)	57.3 (1,455)	59.6 (1,514)	54.6 (1,387)	55 (1,397)	57.5 (1,461)	4.0 (3.1)	5649 (2,562)	5,743 (2,605)


Quick Coupler Mounting	Width in. (mm)	A - Length in. (mm)		B - Height in. (mm)		C - Clam Opening in. (mm)	ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)	
		cutting edge	teeth & segments	cutting edge	teeth & segments			cutting edge	teeth & segments
DL200	100.4 (2,550)	56.0 (1,422)	49.6 (1,260)	42.4 (1,077)	42.4 (1,077)	48.5 (1,232)	2.5 (1.9)	3300 (1,497)	3469 (1,574)
DL220	100.4 (2,550)	60.6 (1,539)	54.1 (1,374)	47.5 (1,207)	47.5 (1,207)	62.3 (1,582)	3.0 (2.3)	3537 (1,604)	3706 (1,681)
DL250	107.8 (2,738)	61.4 (1,560)	55.0 (1,397)	47.5 (1,207)	47.5 (1,207)	62.3 (1,582)	3.3 (2.5)	3819 (1,732)	3908 (1,773)
DL300	114.2 (2,901)	78.9 (2,004)	72.4 (1,839)	50.0 (1,270)	50.0 (1,270)	53.5 (1,359)	3.5 (2.7)	4850 (2,200)	4894 (2,220)
DL350	119.7 (3,040)	68.3 (1,735)	61.8 (1,570)	54.4 (1,382)	54.4 (1,382)	57.5 (1,461)	4.0 (3.1)	5354 (2,429)	5371 (2,436)

ROCK BUCKET



Severe digging is no problem for this tough bucket. Spade nose style. Weld-on teeth come standard. Capacities from 4 to 6 yd³.

Pin-On




Pin-On Mounting	Width in. (mm)	A - Length in. (mm)	B - Height in. (mm)	ISO Heaped Capacity yd ³ (m ³)	Weight lbs. (kg)
DL400	128.9 (3,275)	67.6 (1,717)	54.0 (1,372)	4.0 (3.1)	7,472 (5,713)
DL450	128.9 (3,275)	68.6 (1,742)	54.0 (1,372)	4.5 (3.4)	7,637 (5,838)
DL500	136.2 (3,459)	82.1 (2,085)	68.5 (1,740)	6.0 (4.6)	8,692 (6,646)

PALLET FORK




Easily lift, carry and place materials. Four models available.

Quick Coupler



Quick Coupler Mounting	Carriage Width in. (mm)	A - Fork Length in. (mm)	B - Height in. (mm)	Fork Width Closed in. (mm)	Fork Width Open in. (mm)	Weight lbs. (kg)
DL200, DL220, DL250	62.3 (1,581)	48.0 (1,219)	51.5 (1,308)	28.3 (718)	60.0 (1,524)	1438 (652)
DL200, DL220, DL250	62.3 (1,581)	60.0 (1,524)	51.5 (1,308)	28.3 (718)	60.0 (1,524)	1528 (693)
DL300, DL350	106.0 (2,692)	72.0 (1,829)	60.5 (1,537)	28.0 (711)	103.0 (2,616)	2891 (1,311)
DL420, DL450, DL500	106.0 (2,692)	72.0 (1,829)	63.1 (1,603)	38.0 (965)	103.0 (2,616)	3594 (1,630)

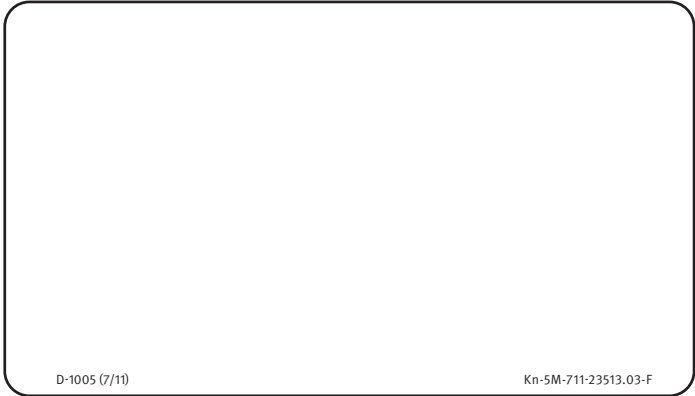

D-1005 (7/11)

Kn-5M-711-23513.03-F

For more information visit www.doosanequipment.com



Doosan® is a registered trademark of Doosan Corp.in. the United States.
© 2011 Doosan Infracore Construction Equipment America – All rights reserved.