



|             | Pay Load               | Heaped Capacity                             |
|-------------|------------------------|---|
| <b>DA30</b> | 61,729 lb. (28 000 kg) | 23.3 yd <sup>3</sup> (17.8 m <sup>3</sup> ) |
| <b>DA40</b> | 88,185 lb. (40 000 kg) | 34.0 yd <sup>3</sup> (26.0 m <sup>3</sup> ) |

# WHEN YOU CHOOSE DOOSAN

as your heavy equipment brand, you'll have the backing of a strong, global organization – with benefits that extend far beyond the capabilities of a new machine.

DOOSAN

### **STRONG BRAND**

Doosan began in 1896. Its heritage in excavators goes back to 1978. Wheel loader production began in 1992, while the company's first articulated dump truck was designed in 1972. Throughout its years in the heavy equipment industry, Doosan has listened to its North American customers, making many improvements – and developing new machines – as a result of feedback from owners and operators. From 2005 to 2015, Doosan grew from its position as the seventh-largest construction equipment manufacturer in the world to the fifth-largest.

### **STRONG DEALERS**

Doosan serves you in partnership with its dealers – and similarly, your Doosan dealer is intended to be a trusted partner for you. Whether it's Doosan parts, authorized service and maintenance, or even advice on how to get more value from your machine, Doosan dealers are behind you on every job.

### **STRONG EQUIPMENT**

Doosan products are known for reliably exceeding customers' most demanding expectations. It's why we're one of the fastest-growing heavy equipment brands in North America. Doosan offers crawler excavators, wheel excavators, compact excavators, wheel loaders, articulated dump trucks, log loaders, material handlers and a variety of job-matched attachments – all designed to perform in the most difficult working conditions.

### **STRONG NORTH-AMERICAN OPERATIONS**

Doosan has built a solid infrastructure to support your equipment. It includes parts distribution in Illinois and Ontario, service training and product management in Georgia, sales training and The Real Operation Center (ROC) customer experience facility in Arizona, attachments design and development in Minnesota, plus sales and marketing support in North Dakota. We can fully support your equipment from coast to coast.

### **STRONG WARRANTY**

Customers choose the months and hours of coverage in their transferable warranty. Options include a standard warranty of 12 months or up to 1,500 hours (depending on the machine) or up to the five-year, 7,500-hour Elite Assurance™ coverage for the powertrain only, the powertrain plus hydraulics or the full machine.



## NEW STANDARDS IN PRODUCTIVITY

High productivity means more material moved every day. The Doosan articulated dump truck (ADT) adds a new level of innovation to the productivity game. In every weight category, Doosan leads the industry with a superior body capacity. It's designed to work in tough conditions and travel more than 34 miles per hour. With its sure-footed traction in rough terrain and its quick-unloading tailgate, the Doosan ADT lineup delivers more, any way you look at it.



**Maximum ground contact gives you big advantages.**

Our exclusive ADT innovations give you excellent driving stability, equal weight distribution and superior traction along with additional load capacity, superior power and better productivity.



*Turning ring placement in front of the articulation point provides equal weight distribution to each front wheel at all times.*





**Innovative  
Front-Mounted Turning Ring**

One of the most innovative features in the Doosan ADT design is the location of the turning ring in relation to the articulation point. Most manufacturers put the turning ring behind the point of articulation. This, along with a 100 percent differential lock, can cause steering difficulties that slow you down. Doosan does it differently: We place the turning ring in front of the articulation point.



This design ensures equal weight distribution to each front wheel in all operating situations. It also enables you to use the differential with only 45 percent locking value to maintain drive to both front wheels and optimize maneuverability without locking them up.



**DOOSAN ADT**

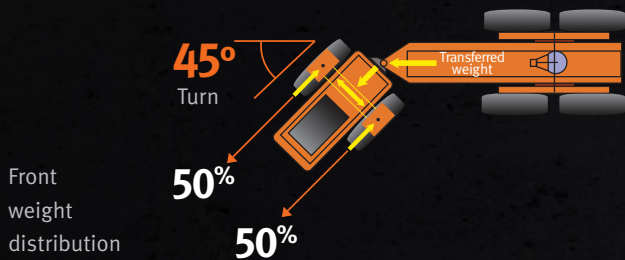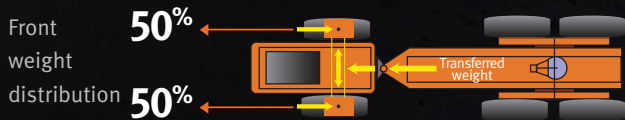

**COMPETITORS' ADT**

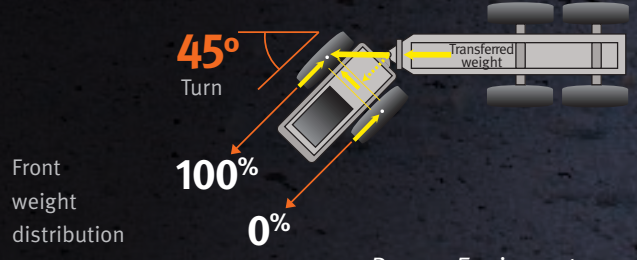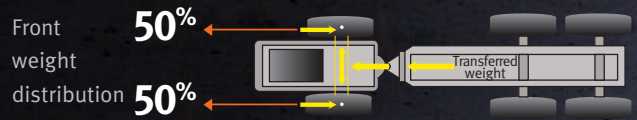



### Tier 4 (T4) Compliant

Optimized to provide more power output with reduced fuel consumption, Doosan ADTs are designed with T4-compliant engines to reduce air pollution.



### Cooled Exhaust Gas Recirculation (CEGR)

CEGR cools and recycles a portion of the engine exhausts to reduce oxygen and lower the temperature in the combustion chamber. This reduces nitrogen oxide ( $\text{NO}_x$ ) emissions.

### Diesel Oxidation Catalyst (DOC)


In the DOC, carbon monoxide (CO) and particulate matter (PM) emissions are transformed into harmless water ( $\text{H}_2\text{O}$ ) and carbon dioxide ( $\text{CO}_2$ ).

### Evaporative Module

In the evaporative module, or mixing pipe, diesel exhaust fluid (DEF) solution is injected in small doses and mixed with hot exhaust gases, decomposing it into urea ( $\text{CO}(\text{NH}_2)_2$ ) and water vapor, which then catalyzes into carbon dioxide and ammonia ( $\text{NH}_3$ ).


### Selective Catalyst Reduction (SCR)

In the SCR canister, nitrogen oxide mixes with ammonia and a chemical reaction takes place, resulting in nitrogen (N) and water vapor emitting from the system. The SCR canister also acts as the silencer or muffler.

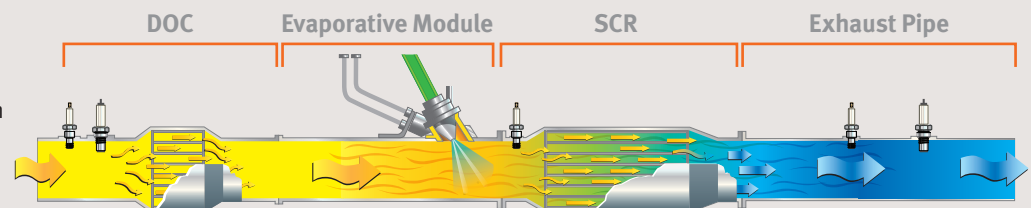

### Unique Sloping Frame for Better Weight Distribution

Some brands use rigid axles which reduce traction and power to the ground. The Doosan ADT's frame is sloped downward from the hinge points to provide equal weight distribution to all wheels when the truck is fully loaded. This provides a lower center of gravity along with superior stability and tractive effort – not to mention better tire wear.

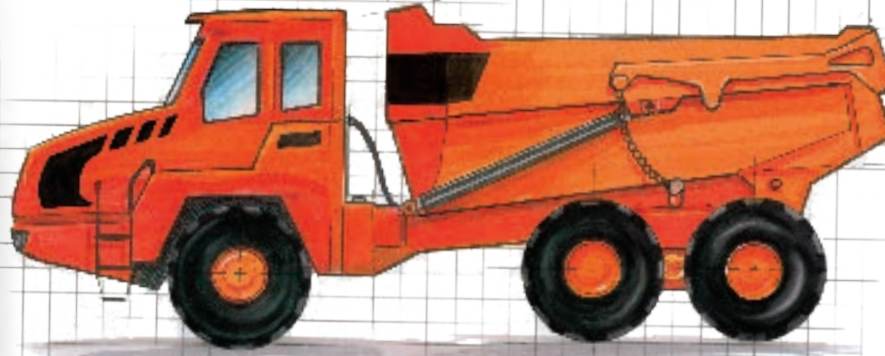


### Free-Swinging Rear Tandem Bogie Suspension

The Doosan ADT's free-swinging gear-driven rear tandem bogie and special articulation system offer excellent performance and the best possible ground contact in soft and uneven terrain for maximum productivity. It also allows easy loading of the truck in almost all positions and applications.



Doosan ADT



Competitors' ADT

### Diesel Exhaust Fluid (DEF)


DEF is a solution of pure urea ( $\text{CO}(\text{NH}_2)_2$ ) and deionized water ( $\text{H}_2\text{O}$ ). A minimum level of DEF is required for proper machine operation, and the DEF supply tank is heated for proper operation in cold weather. DEF is available from your Doosan dealer in various container sizes.

#### DEF Tank



### Front Wheel Suspension

The unique independent front suspension allows free movement of one side, keeping the front wheels in contact with the ground for excellent traction and shock absorption.

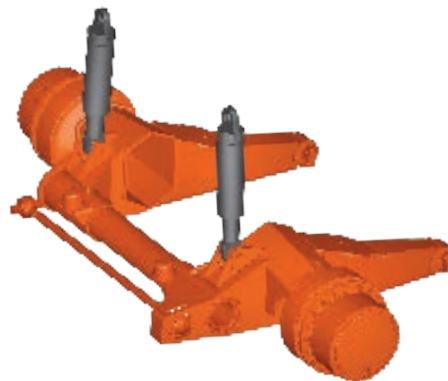

### Center of Gravity Adjustment

This feature reacts to sticky material in the body during dumping. If the material starts pulling the hoist cylinders backward, the dumping speed is automatically slowed to allow uniform dumping flow and to minimize unstable conditions.



● : Shows position of the gravity point (GP) when hydraulic flow will be reduced .

### Downhill Speed Modulation

Move the accelerator pedal up or down to control downhill braking and easily manage travel speed.





## SEE HOW IT FEELS TO PERFORM TO YOUR FULL POTENTIAL.


The Doosan ADT, with its unique forward-mounted turning ring, sloping rear frame and free-swinging tandem bogie, has maneuverability that's hard to match and performance that can't be beat. It all comes down to more contact with the ground, better traction, better use of power and faster work with better results.

### Single Driveline



The single driveline provides a power split of one-third to the front and two-thirds to the rear, which delivers the optimal balance of power and weight distribution. In slippery conditions, a longitudinal differential is locked, causing front and rear wheels to turn at the same speed for best traction. Power distribution is then 50 percent front, 50 percent rear.

With the DA40's state-of-the-art, limited-slip differentials in the front and rear, and a lockable rear differential on the DA30, Doosan ADTs always deliver best-in-class traction.

### Doosan ADT Driveline

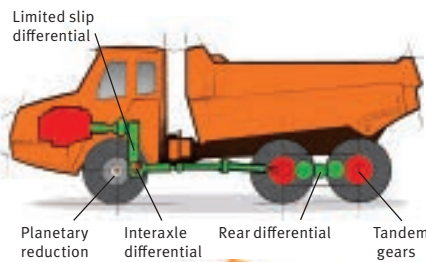

### Competitor Driveline

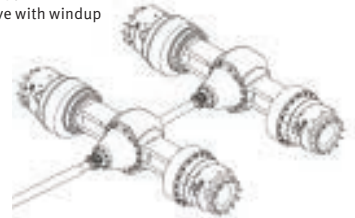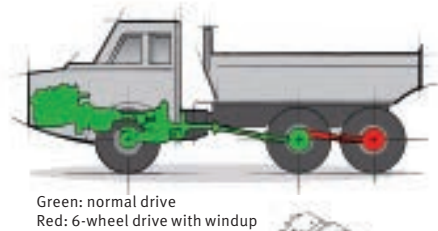





### **One Rear Differential**

One rear differential allows Doosan ADTs to use free-swinging gear-driven rear tandem housings on the rear axle. This enables maximum ground contact and eliminates driveline windup that occurs with the two-rear-differential design found on machines from other manufacturers.

### **Optional High-Floatation Tires**

Wide flotation tires are available as an option for jobs requiring low ground-bearing pressure.

### **Unique Front-Mounted Differential**

Since the front differential is bolted to the front of the transmission, the total length of the truck is reduced. This design brings better weight distribution and a smaller turning radius. That's an important advantage in confined areas.



### **Wet Disc Brakes for Each Wheel**

The oil-cooled wet disc brakes on all six wheels provide excellent braking performance.




## THE TOUGHEST TRUCKS AROUND

Doosan ADTs are among the most reliable dump trucks in the industry thanks to our long history of using reliable and proven components and manufacturing processes.



### Best Manufacturing, Best Components

With in-house control of all machining and robotic welding, Doosan maximizes the durability of all its assemblies. Doosan ADTs use proven, specifically designed engine and transmission components tested not only by our suppliers, but also by Doosan itself.

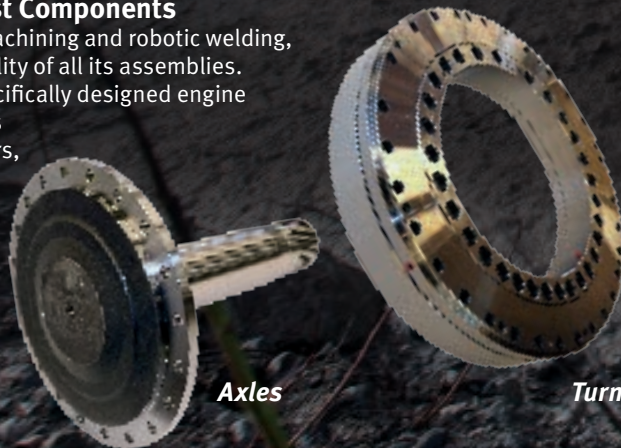

Axles

Turning ring

### One Rear Differential

Since there is only one rear differential on Doosan ADTs, the driveline delivers more power with fewer parts.





### **Driveline Durability**

A single driveline delivers the optimal power split of one-third to the front and two-thirds to the rear. Some brands use two rear differentials connected by a drive through system. This type of design is subject to damage from the outside, loss of power and premature wear.

### **Heavy-Duty Brakes**

Dry disc brakes are open and exposed to dirt and water. The wet brakes on Doosan ADTs are not affected by these conditions because they are fully encased in oil. Wet disc brakes last longer, have fewer service intervals and are especially useful in extreme conditions such as in deep mud and water.

Air-cooled front disc brakes on the DA30 do not require forced cooling like most competitors' designs.



## OPERATOR COMFORT



### **OPERATE IN COMFORT AND SIMPLICITY.**

The operator's cab meets both Roll Over Protective Structure (ROPS) and Falling Object Protective Structure (FOPS) criteria. The cab is also equipped with heating and air conditioning, plus a high quality air-suspension seat with a seat belt to provide excellent comfort. Precise steering, good visibility and low noise levels provide a productive and comfortable cab environment for the operator.



### Touch Pad

- Reduced retarder force (affects both retarder and engine exhaust brake): choice of 100 percent or 50 percent retarder force
- Diesel fuel heater ON/OFF
- Interaxle differential lock
- Override button
- Heated seat ON/OFF
- Cab roof and mirror arm front lights ON/OFF
- Rotating beacon ON/OFF

### Best-in-Class Operator Environment

From quiet engines to the roomy, enclosed cab, Doosan ADTs provide exceptional operator comfort with low cab vibration and noise levels. The sloping hood gives the operator an excellent view. The cab is mounted on a special rubber suspension in order to reduce vibration and noise transfer into the cab.



### “Tip-Tronic” Gearshift

Enables the operator to run the truck in both automatic and manual gears to ensure the smoothest possible shifting and momentum while operating the truck. Also acts as a shift inhibitor.

### Excellent All-Around Visibility

The central operator position and the sloping hood provide an open view to the front and sides. The optional heated wide-angle mirrors provide visibility to the sides and rear of the ADT, even in cold weather.



### LCD Color Monitor Panel

- 7-inch color display, resolution of 800 x 480 pixels
- Displays all necessary driving and handling information
- Rear view camera image in instrumentation graphics
- Backlight dimming according to ambient light conditions
- Sub menus for additional and diagnostic functions
- Gradient meter (fore/aft and side/side)
- On-board load weight system



Heat and Air Conditioning



Hot/Cool Box (optional)



Air Suspension Seat



Tilt and Telescopic Steering



### Standard Rear View Camera

The rear view camera provides an additional means to view the machine's surroundings, allowing for increased productivity.



# EASY MAINTENANCE

## DOOSAN MAKES MAINTENANCE SIMPLE.

Even the best equipment needs regular maintenance. If you want a long-lasting machine and minimal effort to get it, Doosan delivers everything you need: onboard diagnostic systems and easy component access, plus a standard fleet management system.



The hood has a wide opening (up to 83°) for easy access to the engine.



Easy maintenance is standard with Doosan ADTs.




A tilting cab allows easy access to the transmission and hydraulic components.



### Doosan Telematics

Doosan's Telematics provides machine intelligence through a device that comes standard on all Doosan machines. The device communicates wirelessly through either cellular or satellite communication. Machine information can be viewed via the CoreTMS website, which then allows you to assess various aspects of your Doosan machine.



#### Key benefits include:

- Review maintenance schedules
- Maximize machine utilization and uptime
- Improve operator efficiency and training
- Monitor fuel use and efficiency
- Receive theft prevention alerts

Electrical and AC connections are at the rear of the cab, allowing for tilting of the cab without disconnecting.



### Standard automatic central lubrication system

With the Vehicle Control Unit (VCU), grease is only pumped at specified intervals when the truck is in motion.

# UNIQUE DESIGN

Day in and day out, in the toughest conditions imaginable, Doosan articulated dump trucks keep coming back for more, often working extensive hours without an engine overhaul. And because durability should never require a sacrifice in ease of use or comfort, a fully automatic transmission and smooth gear shifting allow the operator to concentrate on the work at hand.

Doosan articulated dump trucks have permanent six-wheel drive for equal power distribution to all wheels when loaded. The articulation hinge is positioned behind the turning ring to ensure equal weight distribution to each front wheel while loaded and turning. The sloping rear frame provides a lower center of gravity and improves the overall tipping of the body for increased productivity in even the most demanding conditions.



## Superior Design

- Multiple wet disc brakes
- Rear axle housing
- Rear axle differential
- Gear-drive, free swinging tandem housing
- Parking brake
- Articulation hinge
- Sloping rear frame



Heated Body



Fast Fill



Quarry Tires (optional)



High Flotation Tires (optional)



## Standard/Optional Equipment

- Standard Equipment
- Optional Equipment
- N/A


|   | DA30-5  | DA40-5 |
|---|---|--------|
| <b>ENGINE</b>   |   |        |
| Emissions (EPA)   | T4  | T4     |
| High Pressure Common Rail (HPCR)  | •   | •      |
| Cooled Exhaust Gas Recirculation (CEGR)   | •   | •      |
| Exhaust Brake   | •   | •      |
| Selective Catalyst Reduction (SCR)  | •   | •      |
| Diesel Exhaust Fluid (DEF)  | •   | •      |
| Fuel Filter with Water Separator  | •   | •      |
| Coolant Recovery Tank   | •   | •      |
| Dual Element Dry-Type Air Filter with Evacuator                                     | •   | •      |
| Electronic Engine Control (ECU)   | •   | •      |
| Cool Down Mode  | •   | •      |
| Diesel Powered Coolant Heater   | ■   | ■      |
| Block Heater  | ■   | ■      |
| <b>HYDRAULIC</b>  |   |        |
| Variable Displacement Axial Piston Pump   | •   | •      |
| Cooling Fan - Hydraulic, Variable Speed   | •   | •      |
| Emergency Steering Pump (Ground-driven)<br>- Variable Displacement Radial Piston    | •   | •      |
| <b>ELECTRICAL</b>   |   |        |
| System Voltage - 24V  | •   | •      |
| Alternator - 24V, 100 AMP   | •   | •      |
| 2 x 12V Batteries, 140AH (DA30-5) 225AH (DA40-5) Reserve Capacity                   | •   | •      |
| Blade Type Fuse Panel   | •   | •      |
| Lights, Work (Halogen): Front, Rear   | ■   | ■      |
| Lights, Work (LED): Front, Rear   | ■   | ■      |
| Light, Stop, Tail & Direction Indicators  | •   | •      |
| Rotating Beacon   | ■   | ■      |
| Hour Meter  | •   | •      |
| Rear View Camera  | •   | •      |
| Laptop Service Port   | •   | •      |
| Self-Diagnostics System   | •   | •      |
| Emergency Shutdown Switch   | •   | •      |
| Telematics  | •   | •      |
| <b>CABIN</b>  |   |        |
| Steel, All-Weather & Sound Suppressed   | •   | •      |
| ROPS (ISO 3471)   | •   | •      |
| FOPS (ISO 3449)   | •   | •      |
| Front Window with Wiper/Washer  | •   | •      |
| Tinted Safety Glass   | •   | •      |
| Visor, Retractable  | •   | •      |
| Adjustable Sliding Side Door Window   | •   | •      |
| Defrost   | •   | •      |
| Lockable Doors  | •   | •      |
| Seat<br>- Air Suspension<br>- 2" (51 mm) Seat Belt<br>- Adjustable Height & Recline | - Adjustable Fore/Aft<br>- Adjustable Arm Rests | •      |
| Seat - Heated   | ■   | ■      |
| Instructor's Seat, Folding  | •   | •      |
| Storage for Operator's Manuals  | •   | •      |
| Mirrors<br>- Interior Rear View<br>- Exterior (2)                                   | •   | •      |
| Mirror, Exterior - Heater   | ■   | ■      |
| Fully Adjustable HVAC   | •   | •      |
| Multi-Function LCD Display  | •   | •      |
| Gradient Meter  | •   | •      |
| On-Board Load Weighing System   | •   | •      |
| Cigarette Lighter   | •   | •      |
| AM/FM Stereo with CD Player & MP3 Port  | •   | •      |
| Speakers (2)  | •   | •      |
| Antenna   | •   | •      |
| Space for Cooler Box  | •   | •      |
| Storage   | •   | •      |
| Power Socket, 12V   | •   | •      |
| Beverage Holder   | •   | •      |
| Interior Light  | •   | •      |
| Guard, Rear Window  | •   | •      |
| Cab Tilting System  | •   | •      |
| <b>FRAME &amp; SUSPENSION</b>   |   |        |
| Articulation Hinge  | •   | •      |
| Steering Cylinder, Double-Acting (2)<br>- Cushion, Retracting                       | •   | •      |
| Turning Ring, Forward-Mounted   | •   | •      |
| Towing Hook, Front and Rear   | •   | •      |
| Sloping Rear Frame  | •   | •      |
| Semi-Independent Rubber Spring & Shock Absorbers (Front)                            | •   | -      |
| Semi-Independent Gas-Hydraulic (Front)  | -   | -      |
| Tires - Radial, 23.5 R25  | •   | -      |
| Tires - Radial, 29.5 R25  | -   | •      |
| <b>BRAKES</b>   |   |        |
| Dual Circuit Braking System   | •   | •      |
| Hydraulic, Wet Multiple Discs - 6 (Each Wheel)                                      | •   | •      |
| Parking Brake, Spring-Applied Hydraulic Release - Driveshaft-Mounted                | •   | •      |
| Automatic Engine Brake  | •   | •      |
| Automatic Hydrodynamic Transmission Retarder  | •   | •      |

|   | DA30-5   | DA40-5 |
|---|--|--------|
| <b>CONTROLS</b>   |  |        |
| Adjustable Steering Column<br>- Tilting<br>- Telescoping  | •  | •      |
| Throttle Pedal (Accelerator)  | •  | •      |
| Brake Pedal   | •  | •      |
| Gear Selector "Tip-Tronic"  | •  | •      |
| Body Hoist Lever  | •  | •      |
| Switches, Console-Mounted<br>- Key Switch<br>- Park Brake   | •  | •      |
| Buttons & Indicator Lights, Keypad<br>- Parking Lights<br>- Main Lights<br>- Engine Pre-Heater<br>- Hazard Lights<br>- Rear Axle Differential Lock<br>- Interaxle Differential Lock<br>- Retarder Control   | - Fuel Heater<br>- Heated Seat<br>- Heated Mirrors<br>- Rear Work Lights<br>- Rotating Beacon<br>- Work Lights<br>- Interior Cabin Light   | •      |
| Speedometer   | •  | •      |
| Engine Coolant Temperature  | •  | •      |
| Transmission Oil Temperature  | •  | •      |
| <b>DISPLAY MONITOR &amp; WARNINGS</b>   |  |        |
| Buzzer<br>- Brake System<br>- Parking Brake   | •  | •      |
| LCD Information<br>- Fuel Level<br>- DEF Level<br>- Engine Coolant Temperature<br>- Transmission Oil Temperature<br>- Retarder Oil Temperature<br>- Payload Meter<br>- Gradient Meter<br>- Engine rpm   | - Speedometer<br>- Transmission Gear Indicator<br>- Battery Voltage<br>- Digital Clock<br>- Trip Meter<br>- Hour Meter<br>- Fuel Consumption   | •      |
| Warning & Indicator Lights<br>- Seat Belt<br>- Error Code<br>- SCR Warning<br>- Check Engine<br>- Engine Oil Pressure<br>- Radiator Coolant Level & Temperature<br>- Air Filter<br>- Fuel Level<br>- DEF Level<br>- Lights (High, Main, Work, Beacon)<br>- Direction Signal | - Emergency Steering<br>- Transmission Mode<br>- Transmission Lock-Up<br>- Transmission Oil Temp<br>- Transmission Gear Indicator<br>- Retarder Oil Temp<br>- Retarder Brake<br>- Engine Brake<br>- Lubrication System<br>- Body Down<br>- Parking Brake Indicator | •      |
| <b>DRIVELINE</b>  |  |        |
| Transmission, Automatic - Electronic Shift Control  | •  | •      |
| Torque Converter Lock-Up Clutch   | •  | •      |
| 6x6 Drive, Full-time  | •  | •      |
| Tandem Rear Bogle<br>- Gear-Driven<br>- Free-Swinging   | •  | •      |
| Driveline Interaxle Differential<br>- 1/3 Front, 2/3 Rear<br>- Torque Divider, 100% Locking Ratio   | •  | •      |
| Front Axle Transverse Differential<br>- Limited-Slip, 45% Locking Ratio   | •  | •      |
| Rear Axle Transverse Differential (1)<br>- Limited-Slip, 45% Locking Ratio  | -  | •      |
| Rear Axle Transverse Differential (1)<br>- Clutch-Engaged, Torque-Dependent Locking Ratio   | •  | -      |
| <b>BODY</b>   |  |        |
| Body, High Tensile HB400 Steel  | •  | •      |
| Body, None  | ■  | ■      |
| Lifting Cylinder, Double-Acting (2)<br>- Cushion, Extending   | •  | •      |
| Tailgate, Scissor Type  | •  | •      |
| Tailgate, None  | ■  | ■      |
| Spill Guard on Front of Body  | •  | •      |
| Body Heating Kit  | ■  | ■      |
| Body Heating Ready  | •  | •      |
| Body Lining Standard  | ■  | ■      |
| Side Extensions   | ■  | ■      |
| <b>OTHER</b>  |  |        |
| Automatic Lubrication System  | •  | •      |
| Handrails & Service Platforms   | •  | •      |
| Skid-Resistant Steps & Service Platforms  | •  | •      |
| Body Lift Support   | •  | •      |
| Fire Extinguisher   | ■  | ■      |
| First Aid Kit   | ■  | ■      |
| Manuals<br>- Operation & Maintenance<br>- Parts<br>- AEM Safety Manual  | •  | •      |
| Telematics, Three-Year Subscription   | •  | •      |
| Vandalism Protection<br>- Lockable Panels<br>- Lockable Fluid Fill Points   | •  | •      |
| Speed Limitation  | ■  | ■      |
| Tool Kit  | ■  | ■      |
| Warning Triangle  | ■  | ■      |
| Fast Fill   | ■  | ■      |
| Mud Flaps   | •  | •      |

Images of Doosan units may show other than standard equipment or new T4-compliant models.

# Specifications

## Dimensions

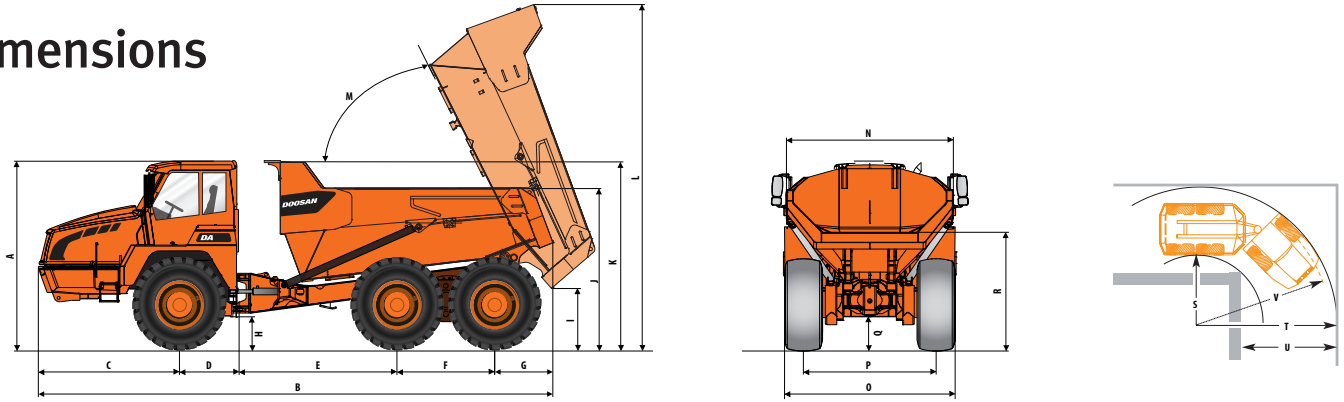

|  |   | UNIT         | DA30-5        | DA40-5          |
|--|---|--------------|---------------|-----------------|
| HEIGHT, CABIN                                | A | ft.-in. (mm) | 11' 8" (3560) | 12' 8" (3850)   |
| LENGTH, OVERALL                              | B | ft.-in. (mm) | 31' 4" (9558) | 34' 9" (10 590) |
| OVERHANG, FRONT                              | C | ft.-in. (mm) | 8' 7" (2650)  | 9' 1" (2775)    |
| ARTICULATION JOINT - FRONT AXLE              | D | ft.-in. (mm) | 3' 11" (1195) | 4' 2" (1275)    |
| ARTICULATION JOINT - REAR AXLE               | E | ft.-in. (mm) | 9' 7" (2916)  | 10' 5" (3170)   |
| WHEELBASE, REAR TANDEM                       | F | ft.-in. (mm) | 5' 10" (1768) | 6' 5" (1960)    |
| OVERHANG, REAR                               | G | ft.-in. (mm) | 3' 5" (1029)  | 4' 8" (1410)    |
| GROUND CLEARANCE, FRONT                      | H | ft.-in. (mm) | 1' 11" (576)  | 2' 2" (652)     |
| BODY DUMP CLEARANCE                          | I | ft.-in. (mm) | 2' (610)      | 2' 6" (763)     |
| BODY LOADING CLEARANCE                       | J | ft.-in. (mm) | 9' 8" (2946)  | 11' (3355)      |
| BODY HEIGHT (LOWERED, TO TOP OF SPILL GUARD) | K | ft.-in. (mm) | 11' 9" (3572) | 13' 2" (4001)   |
| BODY HEIGHT (RAISED, TO TOP OF SPILL GUARD)  | L | ft.-in. (mm) | 20' 4" (6197) | 23' 4" (7120)   |
| BODY DUMP ANGLE                              | M | °            | 70            | 70              |
| BODY WIDTH                                   | N | ft.-in. (mm) | 9' 5" (2875)  | 11' 2" (3395)   |
| TIRE WIDTH                                   | O | ft.-in. (mm) | 9' 10" (2990) | 11' 5" (3475)   |
| TREAD WIDTH                                  | P | ft.-in. (mm) | 7' 9" (2370)  | 8' 10" (2690)   |
| GROUND CLEARANCE, REAR                       | Q | ft.-in. (mm) | 1' 11" (576)  | 2' 4" (706)     |
| BODY FLOOR HEIGHT                            | R | ft.-in. (mm) | 6' 11" (2100) | 7' 10" (2390)   |
| TURNING RADIUS, INSIDE                       | S | ft.-in. (mm) | 12' 9" (3890) | 13' 6" (4120)   |
| TURNING CLEARANCE, OUTSIDE                   | T | ft.-in. (mm) | 26' 4" (8030) | 29' 1" (8850)   |
| ROAD WIDTH, MINIMUM (90° TURN)               | U | ft.-in. (mm) | 17' 4" (5280) | 19' 6" (5930)   |
| TURNING RADIUS, OUTSIDE*                     | V | ft.-in. (mm) | 25' 2" (7680) | 27' 8" (8420)   |

\*Turning radius according to ISO 7457

## Weight

|  |            | UNIT        | DA30-5           | DA40-5           |
|--|------------|-------------|------------------|------------------|
| <b>WEIGHTS</b>                                     |            |             |                  |                  |
| GROSS WEIGHT (NO TAILGATE)                         |            | lb. (kg)    | 113,318 (51 400) | 158,292 (71 800) |
| NET WEIGHT (NO TAILGATE)                           |            | lb. (kg)    | 51,588 (23 400)  | 70,107 (31 800)  |
| PAY LOAD   |            | lb. (kg)    | 61,729 (28 000)  | 88,185 (40 000)  |
| EMPTY (NO TAILGATE)                                | FRONT AXLE | lb. (kg)    | 26,310 (11 934)  | 32,064 (14 544)  |
|  | REAR AXLE  | lb. (kg)    | 25,278 (11 466)  | 34,736 (15 756)  |
| LOADED (NO TAILGATE)                               | FRONT AXLE | lb. (kg)    | 36,597 (16 600)  | 48,045 (21 793)  |
|  | REAR AXLE  | lb. (kg)    | 76,721 (34 800)  | 106,940 (48 507) |
| WEIGHT DISTRIBUTION, EMPTY                         | FRONT/REAR | %           | 51 / 49          | 48 / 52          |
| WEIGHT DISTRIBUTION, LOADED                        | FRONT/REAR | %           | 31 / 69          | 31 / 69          |
| TAILGATE WEIGHT                                    |            | lb. (kg)    | 2,976 (1350)     | 3,307 (1500)     |
| NOTE: All weights include a full tank and operator |            |             |                  |                  |
| <b>GROUND PRESSURES</b>                            |            |             |                  |                  |
| EMPTY  | FRONT AXLE | psi (bar)   | 15.0 (1.0)       | 12.8 (0.88)      |
|  | REAR AXLE  | psi (bar)   | 7.7 (0.53)       | 7.0 (0.48)       |
| LOADED   | FRONT AXLE | psi (bar)   | 20.5 (1.41)      | 18.9 (1.3)       |
|  | REAR AXLE  | psi (bar)   | 23.5 (1.62)      | 22.0 (1.52)      |
| Measured with standard tires with 15% sinkage      |            |             |                  |                  |
| <b>POWER (NET) TO WEIGHT RATIO</b>                 |            |             |                  |                  |
| EMPTY  |            | hp/t (kW/t) | 14.03 (11.54)    | 14.46 (11.88)    |
| LOADED   |            | hp/t (kW/t) | 6.39 (5.25)      | 6.23 (5.12)      |

# General

|                                      | UNIT                                     | DA30-5   | DA40-5   |
|--------------------------------------|--|--|--|
| <b>ENGINE</b>                        |  |  |  |
| MODEL                                |  | Scania DC9   | Scania DC13  |
| NUMBER OF CYLINDERS                  | INLINE                                   | 5  | 6  |
| POWER RATING GROSS (HP per ISO 3046) | hp (kW) @ rpm                            | 370 (276) @ 2,100  | 493 (368) @ 1,900  |
| POWER RATING NET (HP per ISO 9249)   | hp (kW) @ rpm                            | 362 (270) @ 2,100  | 483 (360) @ 1,900  |
| MAXIMUM TORQUE GROSS                 | ft.-lb. (Nm) @ rpm                       | 1,381 (1873) @ 1,300   | 1,750 (2373) @ 1,300   |
| PISTON DISPLACEMENT                  | in. <sup>3</sup> (L)                     | 568 (9.3)  | 775 (12.7)   |
| BORE AND STROKE                      | in. x in. (mm x mm)                      | 5.0 x 5.5 (127 x 140)  | 5.1 x 6.3 (130 x 160)  |
| STARTER                              | V, hp (Kw)                               | 24, 7.5 (5.5)  | 24, 7.5 (5.5)  |
| BATTERY                              | V, AH                                    | 2 x 12, 140  | 2 x 12, 225  |
| ALTERNATOR                           | V, amp                                   | 24, 100  | 24, 100  |
| AIR CLEANER                          |  | Double Element, Dry  | Double Element, Dry  |
| <b>HYDRAULICS</b>                    |  |  |  |
| MAIN PUMP                            | gpm (L/min)                              | 80.6 (305)   | 80.6 (305)   |
| RELIEF PRESSURE (MAIN)               | psi (bar)                                | 4,061 (280)  | 4,061 (280)  |
| EMERGENCY STEER PUMP                 | gpm (L/min)                              | 13.2 (50)  | 13.2 (50)  |
| RELIEF PRESSURE (EMER. STEER)        | psi (bar)                                | 3,046 (210)  | 3,046 (210)  |
| <b>ENVIRONMENT</b>                   |  |  |  |
| SOUND LEVEL (per ISO6395)            | dB(A)                                    | 108  | 107  |
| CABIN SOUND LEVEL (per ISO 6394)     | dB(A)                                    | 72   | 71   |
| <b>TRANSMISSION SPEEDS</b>           |  |  |  |
| TRAVEL SPEED - FORWARD (8)           | mph (km/h)                               | 3.1 / 5.0 / 6.8 / 9.3 / 13.7 / 18.6 / 26.1 / 34.2<br>(5 / 8 / 11 / 15 / 22 / 30 / 42 / 55) | 3.1 / 5.0 / 6.8 / 9.3 / 13.7 / 18.6 / 26.1 / 34.2<br>(5 / 8 / 11 / 15 / 22 / 30 / 42 / 55) |
| TRAVEL SPEED - REVERSE (4)           | mph (km/h)                               | 3.1 / 5.0 / 6.8 / 9.9<br>(5 / 8 / 11 / 16)   | 3.1 / 5.0 / 6.8 / 9.9<br>(5 / 8 / 11 / 16)   |
| <b>REFILL CAPACITIES</b>             |  |  |  |
| FUEL TANK                            | gal. (L)                                 | 88.5 (335)   | 140 (530)  |
| DIESEL EXHAUST FLUID TANK            | gal. (L)                                 | 10 (38)  | 10 (38)  |
| COOLING SYSTEM (RADIATOR)            | gal. (L)                                 | 11.9 (45)  | 13.2 (50)  |
| ENGINE OIL                           | gal. (L)                                 | 8.7 (33)   | 11.6 (44)  |
| TRANSMISSION                         | gal. (L)                                 | 19.8 (75)  | 19.8 (75)  |
| FRONT DIFFERENTIAL                   | gal. (L)                                 | 3.5 (13.2)   | 3.5 (13.2)   |
| REAR DIFFERENTIAL                    | gal. (L)                                 | 4.2 (16)   | 12.2 (46)  |
| FRONT HUB (2)                        | gal. (L)                                 | 2.9 (11)   | 2.0 (7.5)  |
| TANDEM HOUSING                       | gal. (L)                                 | 12.7 (48)  | 37.0 (140)   |
| HYDRAULIC TANK                       | gal. (L)                                 | 32.5 (123)   | 55.2 (209)   |
| <b>BODY</b>                          |  |  |  |
| TIPPING TIME                         | seconds                                  | Up: 12 / Down: 10  | Up: 10 / Down: 10  |
| LEVEL CAPACITY                       | WITH TAILGATE                            | yd <sup>3</sup> (m <sup>3</sup> )  | 18.6 (14.2)  |
|                                      | WITHOUT TAILGATE                         | yd <sup>3</sup> (m <sup>3</sup> )  | 17.8 (13.6)  |
| HEAPED CAPACITY (2:1)                | WITH TAILGATE                            | yd <sup>3</sup> (m <sup>3</sup> )  | 23.3 (17.8)  |
|                                      | WITHOUT TAILGATE                         | yd <sup>3</sup> (m <sup>3</sup> )  | 22 (16.8)  |
| DENSITY INDEX                        | lb./yd <sup>3</sup> (kg/m <sup>3</sup> ) | 2,818 (1666)   | 2,759 (1640)   |

# Cylinders

|                            | UNIT   | DA30-5   | DA40-5      |
|----------------------------|--------|----------|-------------|
| <b>HYDRAULIC CYLINDERS</b> |        |          |             |
| BODY TILT CYLINDERS (2)    | BORE   | in. (mm) | 4.5 (115)   |
|                            | STROKE | in. (mm) | 90.2 (2290) |
| STEERING (2)               | BORE   | in. (mm) | 4.5 (115)   |
|                            | STROKE | in. (mm) | 20.3 (515)  |



# DOOSAN STRONG



1.877.745.7814  
[DoosanEquipment.com/ADT](http://DoosanEquipment.com/ADT)

Printed on 10% recycled paper

Doosan® and the Doosan logo are registered trademarks of Doosan Corp. in the United States and various other countries around the world. ©2017 Doosan Construction Equipment. All rights reserved.

# **DOOSAN**